

PORTABLE

SCREW COMPRESSOR

CF400M-7

SERIES



AIR PRESSURE: 7 bar
FAD: 400 CFM / 11.2 m³/min

Main Improvements:

Availability for wide application

CFAIR model is line up to suit a wide range of applications such as pneumatic tools drilling and blasting.

Easy Starting in Cold Weather

This compressor is superior in cold weather starting.

Meters with Luminous Lights

Meters on operation panel are equipped with luminous light.

Reliable Warning Signal

Warning signals have luminiscent diode and so become more reliable.


Double Element Air Cleaner

Double element air cleaner prevents dust from entering when replacing element.

Easy Cleaning of Cooling System

This compressor is so designed that the interiors of radiator and oil cooler and also fuel tank can be easily and quickly clean

HANGZHOU CAIFULL PRECISION MACHINERY CO.LTD

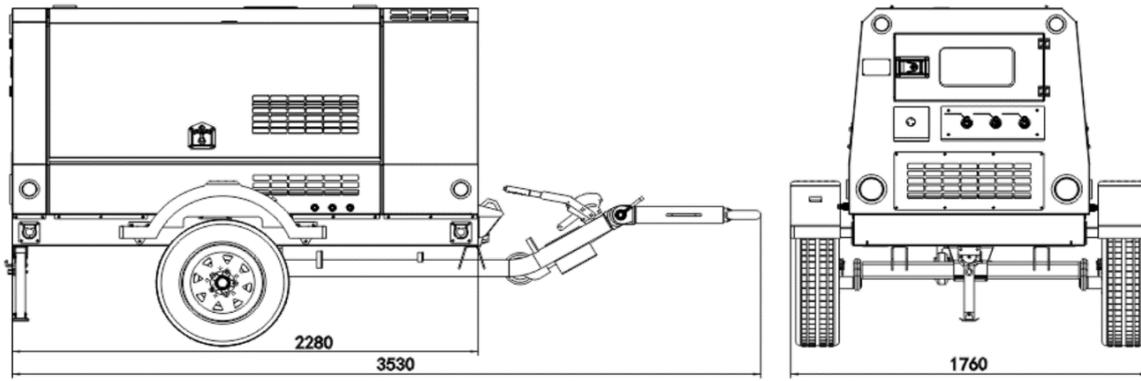

COMPRESSOR

Type	Rotary twin screw, single stage, oil-cooled
Free air delivery	11.2 m ³ /min(400 cfm)
Working pressure	7 bar (101.5 psi)
Unloader	Suction port closing in connection with stepless speed regulator
Lubrication system	Forced lubrication by compression pressure
Driving system	Direct coupling with rubber
Oil cooling	Air-cooled
Air cleaner	Dry paper filter type

OIL SEPARATOR-RECEIVER TANK

Type	Vertical, cylindrical, full-welded
Shell dia	250 mm
Shell length	784 mm
Capacity	75 L
Max. working pressure	1.58MPa
Hydraulic test pressure	2.37MPa
Air outlet valve	3pcs x 3 /4'' + 1pc x 2''
Recommend Oil type	#46

DIESEL ENGINE

Model	CUMMINS 4BTA3.9-C125
Type	Water-cooled, 4-cycle, Direct-Injection, Turbo-Charged type
No. Of cylinders	4
Bore x stroke	102 mm x 120 mm
Total displacement	3.9 liters
Compression ratio	17.3 : 1
Rated output	93 kW(125PS) 2,200rpm
Max.torque	475 N.m/approx.1,500rpm
Governor	Mechanical
Alternator	DC28V
Starting motor	DC12V
Battery	60AH X 2 pcs, 580CCA
Air cleaner	Two-stage dry type

INSTRUMENTS & GAUGES

EMERGENCY STOP DEVICES

- Oil pressure switch
- Engine coolant temperature switch
- Discharge air temperature switch
- Compressor oil temperature switch
- Engine speed down switch

GAUGES

Air Pressure gauge	Tachometer
Fuel level gauge	Engine oil pressure
Stop button	Engine coolant temp
Starter switch	Discharge air temp
Starting Loader	Discharge air pressure
	Hourmeter

LIQUID CAPACITY

Fuel tank capacity	160 liters
Engine oil capacity	16.3 liters
Coolant capacity	30 liters
Compressor oil capacity	60 liters

DIMENSIONS & WEIGHT

L x W x H	4567 x 2027 x 2000 mm
Weight	2100 Kg
20ft container	2 sets
40HQ container	4 sets



INDONESIA DEALER:

PT VIDISTAR INDOQUIP PRADANA

Plaza Summarecon Bekasi, Jl. Bulevar Ahmad Yani Kav 01, Level 7

Harapan Mulya, Medan Satria, Kota Bekasi

Phone: +62 21 2960 1461 / WA: +62 851 5520 7890

Email: sales@vip-equipment.com

www.vip-equipment.com



**VIDISTAR
INDOQUIP
PRADANA**

Excellence in Every Interaction



SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive

